

DABLIUTOUCH

Mod. L1R | PRO



Android 14

 8 GB

 256 GB

 65" | 75" | 86"

Google EDLA

Display	
Screen Type	TFT LCD
Aspect Ratio	16:9
Viewing Angle	178°
Resolution	4K UHD (3840 × 2160 @ 60 Hz)
Back Light Unit	DLED OD20
Color Glamut	NTSC 72%
Response Time	6.5 milliseconds or less
Refresh Rate	60Hz
Display Color	1.07Billion
Glass Hardness	9H (pencil), 7 (Mohs)
Glass Type	AG Glass 3mm
Bonding Type	Zero bonding

Computing	
Operating System	Android™14
RAM	8GB
ROM	256GB
Chip	RK3576
CPU	A72*4+A53*4
GPU	Mali G52 MC3
OTA	Yes
WIFI&Blue tooth	Dual WIFI6+BT5.2
OSD	German, English, Spanish, French, Italian, Hungarian, Croatian, New Zealand language, Arabic, Russian.10 languages

Included accessories

Pen x2 , remote control x1, wall mount x1, power cable x1, manual x1, Usb touch cable x1, HDMI cable x1

Interactivity	
Touch Points	50
Touch Technology	IR
Touch Accuracy	1mm 90% Central area
Max T. Resp. Time	5 milliseconds
Tracking Rate	≥5m/s
ScanRate	200 Hz
Pen Type	Battery-less
Pen Holder	yes
Touch Hight	1.5mm
Compatibility	Windows® 7-10 OS X® 10.8 to 10.11 macOS® Sierra 10.12.1® or later Linux® Ubuntu® 18.04 LTS Chrome OS™

Interface (Front)	
Type C PD 100w	1
USB 3.0	3
Touch USB 2.0	1
HDMI-IN 2.0	1

Audio	
Speaker	Face to front
Power	2*20W

Optional module OPS


(120 × 180 × 30 mm)

Interface (Rear)	
USB3.0	2
USB2.0	1
Touch USB3.0	2
Type C PD 15w	1
DP IN	1
HDMI IN 1.4	1
HDMI IN 2.0	2
RS232	1
RJ45 1000M	2
HDMI OUT	1
SPDIF OUT	1
Line OUT	1
Mic IN	1
Audio IN	1
VGA IN	1
OPS slot 80pin	1
WIFI&Blue tooth	Dual WIFI6+BT5.2

Environmental	
Operating Temperature	0°C- 40°C
Storage Temperature	-20°C-60°C
Operating Humidity	20%-80%RH
Storage Humidity	20%-80%RH

	65” Cod. L1R-146A	75” Cod. L1R-147A	86” Cod. L1R-148A
Display Area	1432×815 mm	1651×928 mm	1895×1065 mm
Contrast Ratio	5000:1	5000:1	4000:1
Brightness(typ)	450 cd/m2	450 cd/m2	450 cd/m2
Dimensions	1489 × 897.9 × 85 mm	1710 × 1022 × 85 mm	1953.74 × 1159.41 × 88,1 mm
Pack Dimensions	1657 × 185 × 1007 mm	1873 × 1134 × 202 mm	2110 × 222 × 1270 mm
Wall-hanging Screw	M8×20mm	M8×20mm	M8×20mm
Net Weight	31.6 KG	43.55 KG	55.82 KG
Gross Weight	42.12 KG	57.4 KG	158.44 KG
VESA	600×400mm	800 ×400mm	800 ×600mm
Requirements	100-240V 50/60Hz 4.5A	100-240V 50/60Hz 4.5A	100-240V 50/60Hz 4.5A
Consumption (Max)	450 W	480 W	550W
Consumption (Standby)	≤0.5W	≤0.5W	≤0.5W

Technical drawings

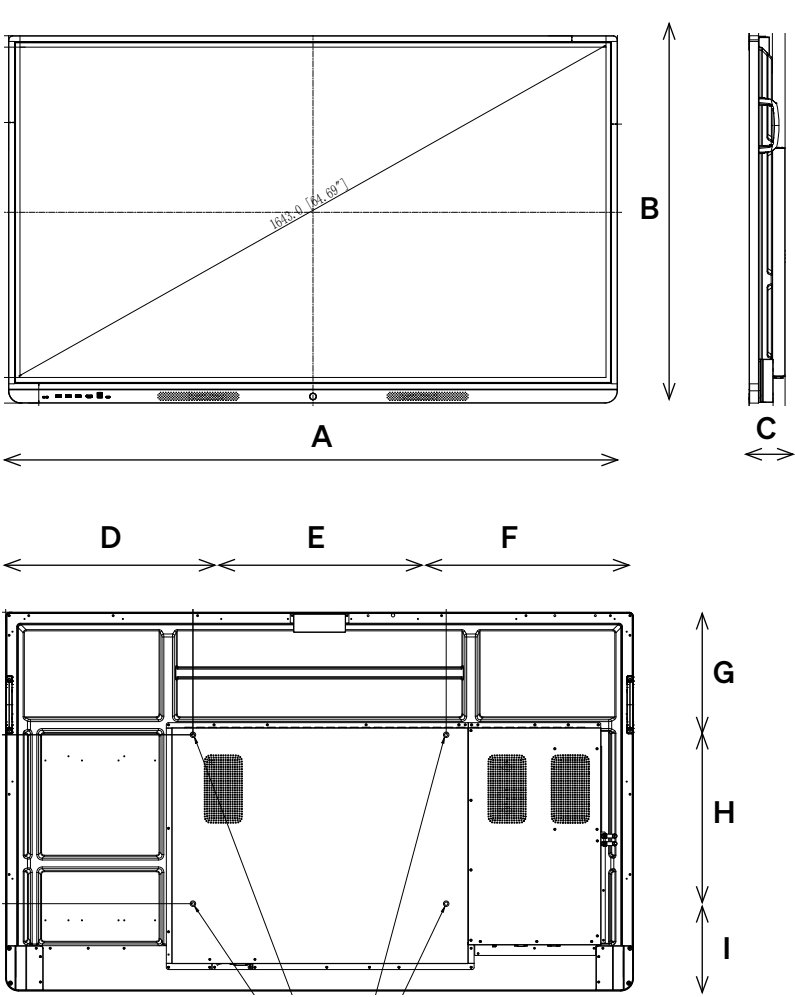

	65” mm	75” mm
A	1487,2	1708,9
B	897	1021,7
C	87,8	87,9
D	443,6	454,5
E	600	800
F	443,6	454,5
G	290,2	212,5
H	400	400
I	206,8	409,2

	86” mm
A	1953,74
B	1159,41
C	88,1
D	576,87
E	800
F	576,87
G	305,81
H	600
I	253,6

© 2025 Wacebo. All rights reserved.

The content of this document, including images, texts, specifications, and layouts, is the property of Wacebo and is protected by applicable intellectual property laws. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means without the prior written permission of Wacebo. Product specifications and features are subject to change without notice.